
BY BENYAR

Watch Setting Guide

(Model: BY-5140)

Language: English

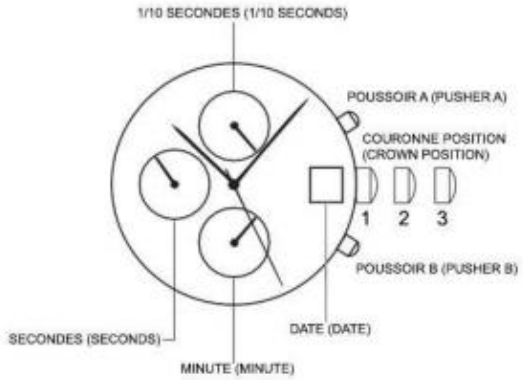

FEATURE:

- Crown position "1", "2" & "3".
- Pushers "A" (top) & "B" (bottom).
- 12 o'clock eye "1/10 seconds elapsed".
- 9 o'clock eye "seconds elapsed".
- 6 o'clock eye "minutes elapsed".

This chronograph watch has 4 functions:

TIME, DATE, TACHYMETER, STOPWATCH.

TIME:

To set the time:

1. PULL crown to "3" position.
2. TURN crown either way to correct time.
3. PUSH crown into "1" position.

DATE:

To set the date:

1. PULL out crown to "2" position.
2. TURN crown clockwise to correct date.
3. PUSH in crown to "1" position.

Note: The date changes automatically every 24 hours.

TACHYMETER :

Also called a tachometer, it allows to measure the speed of travel over a given distance. It is frequently used to determine the speed of a car over a measured distance.

BY BENYAR

Watch Setting Guide

(Model: BY-5140)

STOPWATCH:

The stopwatch is capable of measuring:

1/10 seconds elapsed up to one second (top eye). Minutes elapsed up to one hour (bottom eye).
Seconds elapsed up to one minute (middle eye)

BEFORE USING THE STOP WATCH, reset the stopwatch hands to the "60" and "0" positions.

To reset stopwatch hands:

1. PULL crown to position "3".
2. PRESS pusher "A" intermittently until the top eye hand is reset to "0".
3. PRESS pusher "B" intermittently until the middle and top eye hands is reset to "60".

Note: PRESSING and HOLDING either pusher "A" or "B" will cause the hands to continue to move until the pusher is released.

If the stopwatch hands move improperly:

1. PULL out the crown to "2" position.
2. PRESS pushers "A" & "B" simultaneously for three seconds.
3. RELEASE pushers, stopwatch hands will move 180 degrees.
4. PUSH crown in to "1" position.

Standard stopwatch measurement:

1. PRESS pusher "A" to start timing.
2. PRESS pusher "A" to stop timing.
3. PRESS pusher "B" to reset.

Timing 2 competitors:

1. PRESS pusher "A" to start timing.
2. PRESS pusher "B" to stop timing.
3. PRESS pusher "A" to stop timing of second event.
4. PRESS pusher "B" to view time of second event.
5. PRESS pusher "B" to reset.

Split time:

1. PRESS pusher "A" to start timing.
2. PRESS pusher "B" to split.
3. PRESS pusher "B" to begin again.
4. PRESS pusher "A" to stop.
5. PRESS pusher "B" to reset.