1980 OPERATION MANUAL



(A Key) MODE


(B Key) ST/STP

(C Key) SET/LIGHT

Features

- 13digits LCD Display, display Hour, Minute, Second, Year(2000~2099), Month, Day and Week
- Daily Alarm, Chime hourly and Snooze Function
- 1/100 second chronograph function with 60 segmented recording times, the maximum stopwatch is 23 hours, 59 minutes, 59.99 seconds
- Countdown function
- Select 12 or 24 hour display
- EL backlight

Operational Manual

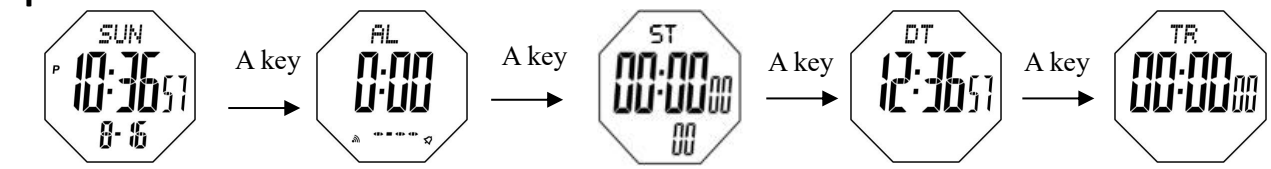


Normal Time Mode | Alarm Mode | Stopwatch Mode | Dual Time Mode | Countdown Mode

In any mode, press C key the EL backlight will light up for 3s.

1. Normal Time Mode


- In normal time mode, press B key to convert 12H/24H.
- In normal time mode, press C key for 3s to enter the time setting mode, and the "Second" flashes at the same time, then press A key to select the items to be set in following sequence:

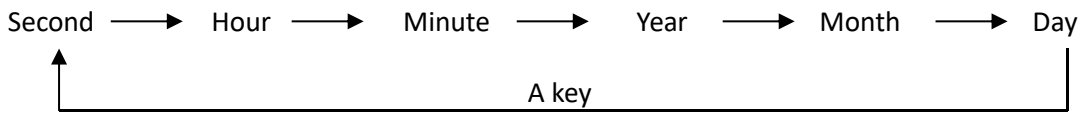

- Press B key to adjust the flashing item and long press B key for quickly adjust.
- Press C key to exit.

2. Alarm Mode

- Alarm clock and snooze function off and on: In alarm mode, press C key to turn on/off the alarm function (displayed when turned on) and snooze function (displayed when on: SNZ).
- To turn on/off the chime hourly : In the alarm mode, press the B key to enter the chime hourly mode, and press the C key to turn on or off the chime hourly function in turn (displayed when turned on).
- In alarm mode, press C key for 3s to enter the alarm setting mode, and the "Hour" flashes at the same time. Then press A key to select the items to be set in following sequence:

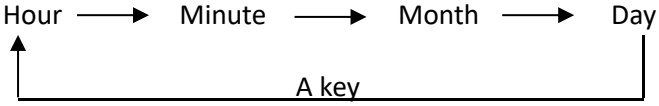

- Press B key to adjust the flashing item and long press B key for quickly adjust.
- Press C key to exit.


Note:

- Daily alarm, monthly alarm, 10s alarm ring.
- Snooze function: when the snooze function is on, the alarm will ring 10s every 5 minute, a total of 7 times.


3. Stopwatch Mode

- The maximum measured value of the stopwatch : 23 hours 59 minutes 59.99 seconds.
- 1/100 second chronograph function with 60 segmented recording times.
- Operation of stopwatch:

Elapsed time:

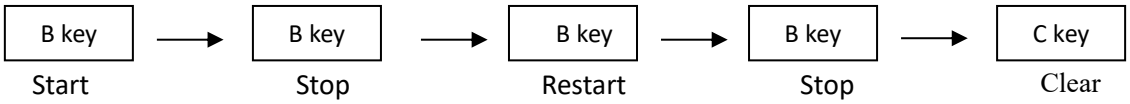

Split time:

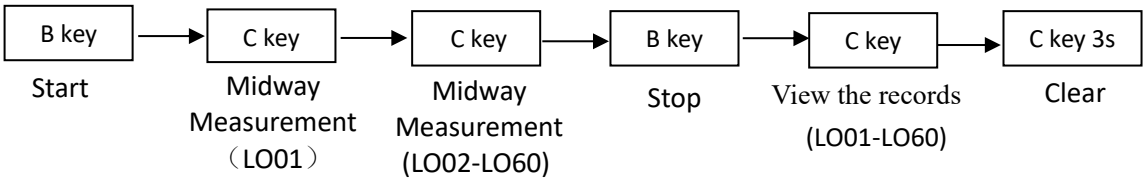

Note:


- When the stopwatch is timing, press A key can convert to other mode, and the timing won't stop.
- To View the records of each group: in the stop timing state, press the C key to display the records from the first group to the recorded groups in sequence.

4. Dual Time Mode

- In dual time mode, press C key for 3s, the "Hour" flashes, press A Key to select the "Minute" and "Hour" in sequence.
- Press B key to adjust the flashing item and long press B key for quickly adjust.
- Press C key to exit.

5. Countdown Mode

- The maximum value of the countdown: 24 Hours.
- Countdown setting: in countdown mode, press C key for 3s, the "Second" flashes, press A key to select the items as following sequence:

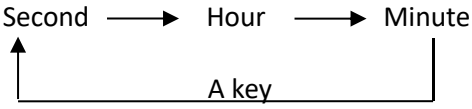

- Press B key to adjust the flashing item and long press B key to quickly adjust.
- Press C key to exit.
- In countdown mode, press B key to start/stop counting.
- When the count is over, it will ring for 15s.